

The following SDS references the products below:

*Crimped End Brush, 3/4" outside diameter , brass coated steel wire gauge .006", 1/4" shank, JAZ standard markings and packaging. Maximum safety RPM: 20,000. Recommended working max.RPM:11,000*

*Vendor Item Number: 14220*

Manufactured By:

*Jaz USA, Inc*

Distributed by Kimball Midwest with the KM product-identification number:

*87-1190*

***KIMBALL  
MIDWEST***  

---

*Specializing in Materials Management*

---

MATERIAL DATA SHEET	PAGE: 1 OF 2
MODEL: 14220	DATE: 17-05-2016


### SECTION I. PRODUCT DESCRIPTION

---

**Crimped End Brush, 3/4" outside diameter , brass coated steel wire gauge .006", 1/4" shank, JAZ standard markings and packaging. Maximum safety RPM: 20,000. Recommended working max.RPM:11,000**

### SECTION II. PHYSICAL DATA AND DIMENSIONS

---

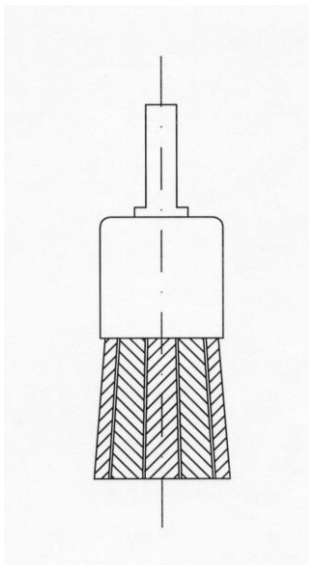

**According to above drawing, 3/4" diameter,  
1" trim length.  
Total N° of .006" wire ends in the brush: 1,236  
Weight of total product: 45 gr.**

### SECTION III. CHEMICAL COMPOSITION OF WIRE

---

**Brass Coated Steel Wire with following chemical composition:**

**C = 0,65 – 0,85%**

**Mn = 0,40 – 0,80%**

**Si = 0,15 – 0,30 %**

**There is no special requirements nor standards in the technical brushware industry related to the steel wires used in our products.**



<b>MATERIAL DATA SHEET</b>	<b>PAGE: 2 OF 2</b>
<b>MODEL: 14220</b>	<b>DATE: 17-05-2016</b>

---

#### **SECTION IV. SAFETY DATA**

**The European Standard EN 1083-2 about Safety Requirements in the use of Power-driven brushes states the safety instructions that all brush operators must observe. These requirements and common safety practices will reduce the likelihood of physical injury and brush fail: Wear safety goggles, protective clothing and equipment.**

**Observe all speed restrictions indicated on the brushes, packaging or catalogue.**

**And do not exceed Maximum Safe Free Speed (Max. RPM) under any circumstances.**

**Keep machine guards in place.**

**Do not use deteriorated brushes**

**The power tool speed influences the performance of the brush and the safety of the operator. If load speed marked on the power tool is higher than the brush Maximum RPM do not mount brush. Maximum RPM are indicated on brush side-plates and shall never be exceeded. For most brushing applications optimum results are achieved at the Recommended RPM specified in our catalogue for every power driven brush.**

**Eibar, Spain, May 17th 2016.**

**Signed by: OSCAR VAZQUEZ  
Manufacturing Director**

**Signed by: MANUEL LEDO  
Quality Manager**